


TS3/TF3 series



- Top plate fixing.
- Ball bearing swivel head.
- Matching swivel and fixed castors.

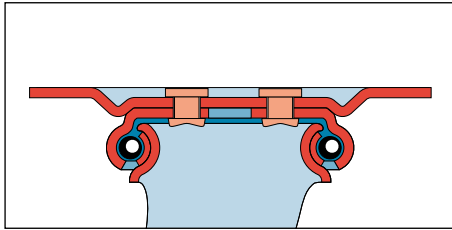

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel		
				centre	tyre		swivel	fixed	rep wheel
63	94	65	25	polypropylene	cushion rubber	30	TS3 063 RL03	TF3 063 RL03	063 RL03
			25	nylon		120	TS3 063 NY03	TF3 063 NY03	063 NY03
			25	cast iron	rubber	70	TS3 063 RU03	TF3 063 RU03	063 RU03
			25	cast iron	polyurethane	90	TS3 063 PT03	TF3 063 PT03	063 PT03
75	107	72	25	polypropylene	cushion rubber	40	TS3 075 RL03	TF3 075 RL03	075 RL03
			25	nylon		125	TS3 075 NY03	TF3 075 NY03	075 NY03
			25	cast iron	rubber	70	TS3 075 RU03	TF3 075 RU03	075 RU03
			25	cast iron	polyurethane	125	TS3 075 PT03	TF3 075 PT03	075 PT03
100	132	84	25	polypropylene	cushion rubber	50	TS3 100 RL03	TF3 100 RL03	100 RL03
			25	nylon		125	TS3 100 NY03	TF3 100 NY03	100 NY03
			19	cast iron	polyurethane	125	TS3 100 PT03	TF3 100 PT03	100 PT03

1.2 Pressed Steel Castors



Standard fixings

TS3
TF3

■ = 110 x 80mm
● = 80 x 60mm
● = 89 x 51mm
■ = M8 ■ = M6

Adaptions

1 Wheel brake
Swivel castors only
Foot operated wheel brake
Add suffix 'B' to castor code

2 Head seal
Swivel only
Prevents ingress of dirt and dust
Add suffix 'S' to castor code

3 Threadguards
Swivel & fixed, most wheels
Prevent thread from binding wheel
Add suffix 'T' to castor code

Head seals and Threadguards can be fitted in conjunction with most other adaptions

4 Alternative T19 top plate
Add 'T19' to castor code

■ = 140 x 140mm
● = 73-105mm x 73-105mm
■ = M8





BS3/BF3 series




BS3 075 RL03



BF3 075 NY03


- Single hole fixing.
- Ball bearing swivel head.
- Matching swivel and fixed castors.

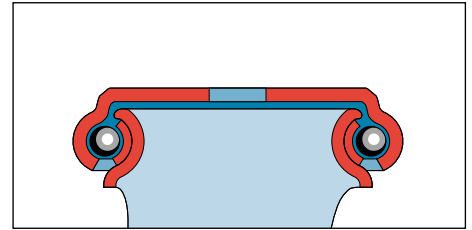

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel		
				centre	tyre		swivel	fixed	rep wheel
63	92	65	25	polypropylene	cushion rubber	30	BS3 063 RL03	BF3 063 RL03	063 RL03
			25	nylon		110	BS3 063 NY03	BF3 063 NY03	063 NY03
			25	cast iron	rubber	70	BS3 063 RU03	BF3 063 RU03	063 RU03
			25	cast iron	polyurethane	110	BS3 063 PT03	BF3 063 PT03	063 PT03
75	104	72	25	polypropylene	cushion rubber	40	BS3 075 RL03	BF3 075 RL03	075 RL03
			25	nylon		110	BS3 075 NY03	BF3 075 NY03	075 NY03
			25	cast iron	rubber	70	BS3 075 RU03	BF3 075 RU03	075 RU03
			25	cast iron	polyurethane	110	BS3 075 PT03	BF3 075 PT03	075 PT03
100	129	84	25	polypropylene	cushion rubber	50	BS3 100 RL03	BF3 100 RL03	100 RL03
			25	nylon		110	BS3 100 NY03	BF3 100 NY03	100 NY03
			19	cast iron	polyurethane	110	BS3 100 PT03	BF3 100 PT03	100 PT03




Standard fixings

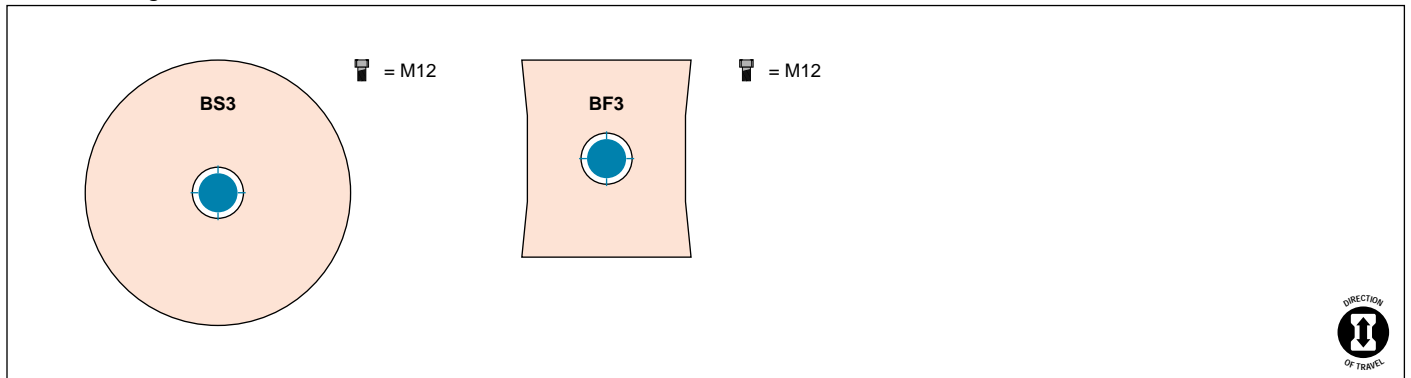

Adaptions


- Wheel brake**
Swivel castors only
Foot operated wheel brake
Add suffix 'B' to castor code



- Head seal**
Swivel only
Prevents ingress of dirt and dust
Add suffix 'S' to castor code

- Threadguards**
Swivel & fixed, most wheels
Prevent thread from binding wheel
Add suffix 'T' to castor code

Head seals and Threadguards can be fitted in conjunction with most other adaptions



- Expanding steel plug**
(see table for castor code suffix)
- Solid steel plug**
(see table for castor code suffix)

4 tube shape	effective range	code suffix
○	18.0 - 19.4	EP1
○	21.2 - 23.2	EP2
○	24.4 - 26.4	EP3
○	27.6 - 29.6	EP4

5 tube shape	effective range	code suffix
○	25.4 (1")	RP3
○	31.75 (1 1/4")	RP5