


- Pressed steel construction
- Double ball race swivel head
- Height adjustable socket fixing

CATERING V30BAL V32BAL

V30B AL + Nylon wheel

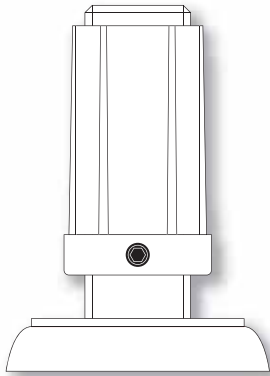


Socket suits tube size of 30mm square x 1.2 - 1.5 guage

Height adjustable by 28mm and locked in position with grub screw



wheel diameter	tread width	fitted height		swivel offset	load capacity	bearing type	swivel		
		min	max				swivel	fixed	swivel + total stop brake
100	27	130	158	38	80	roller	V30B 100 NYR AL3		V32B 100 NYR AL3
125	27	153	181	42	100	roller	V30B 125 NYR AL3		V32B 125 NYR AL3

V30B AL + Grey rubber tyred wheel with polypropylene centre

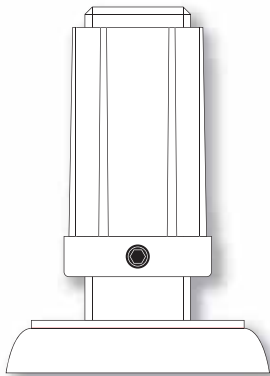

Socket suits tube size of 30mm square x 1.2 - 1.5 guage

Height adjustable by 28mm and locked in position with grub screw



wheel diameter	tread width	fitted height		swivel offset	load capacity	bearing type	swivel		
		min	max				swivel	fixed	swivel + total stop brake
100	27	130	158	38	80	plain	V30B 100 GRP AL3 G		V32B 100 GRP AL3 G
125	27	153	181	42	100	plain	V30B 125 GRP AL3 G		V32B 125 GRP AL3 G

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated