


- Top plate fixing
- Heavy duty pressed steel construction
- Welded king pin with self locking nut
- Axial ball bearing and tapered roller bearing head with dust cover
- Grease nipple

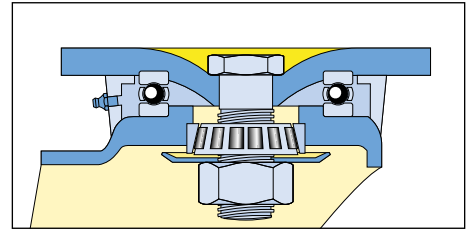

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel			roller bearing wheel			ball bearing wheel		
				centre	tyre		swivel	fixed	rep whl	swivel	fixed	rep whl	swivel	fixed	rep whl
100	145	90	40	nylon		250	6152	6182	4022	6142	6172	4012	6132	6162	4002CC
	145	90	37	nylon		300	18455	18530	18080				18405	18480	18005CC
	145	90	30	cast iron	polyurethane	300				7805	7855	7505	7305	7355	7005CC
	160	100	50	cast iron	polyurethane	450							7306	7356	7006CC
	145	90	30	cast iron		300	6030	6050	1010				6020	6040	1000CC
125	172	113	40	nylon		300	6153	6183	4023	6143	6173	4013	6133	6163	4003CC
			45	nylon		500	18458	18533	18083				18408	18483	18008CC
			40	cast iron	polyurethane	400							7310	7360	7010CC
			50	cast iron	polyurethane	480							7312	7362	7014CC
150	195	130	40	nylon		400	6154	6184	4024	6144	6174	4014	6134	6164	4004CC
	202	140	48	nylon		900	18461	18536	18086				18411	18486	18011CC
	195	130	40	cast iron	polyurethane	500				7816	7866	7515	7316	7366	7015CC
	202	140	50	cast iron	polyurethane	700				7821	7871	7520	7321	7371	7020CC
	195	130	38	cast iron		500							6023	6043	1003CC
	202	140	55	cast iron		1000	6032	6052	1012				6022	6042	1002CC
200	251	170	50	nylon		600	6156	6186	4027	6146	6176	4017	6136	6166	4007CC
			50	nylon		1000	18467	18542	18092				18417	18492	18018CC
			50	cast iron	polyurethane	1000				7831	7881	7530	7331	7381	7030CC
			50	cast iron		1000	6035	6055	1015				6025	6045	1005CC
250	307	210	60	nylon		1200	6159	6189	4029	6149	6179	4019	6139*	6169*	4009CC
			50	cast iron	polyurethane	1200				7835	7885	7535	7335	7385	7035CC
			60	cast iron	polyurethane	1400							7337	7387	7037CC
300	350	243	70	cast iron	polyurethane	1800							7341	7391	7041CC
	380	240	100	cast iron	polyurethane	2800							7344	7394	7044CC
400	505	290	100	cast iron	polyurethane	3200							7346	7396	7047CC

* = load capacity 1400kg

Standard fixings

100mm x 145mm ht

- = 105 x 85mm
- ◆ = 80 x 60mm
- ⊞ = M10

100mm x 160mm ht

125mm
150mm
200mm

- = 135 x 110mm
- ◆ = 105 x 80mm
- ◆ = 105 x 75mm
- ⊞ = M10 except: 150mm x 202mm ht & 200mm
- ⊞ = M12

250mm
300mm x 350mm ht

- = 200 x 160mm
- ◆ = 160 x 120mm
- ⊞ = M14

300mm x 380mm ht
400mm

- = 255 x 205mm
- ◆ = 210 x 160mm
- ⊞ = M16 except: 400mm
- ⊞ = M18

Adaptions

- 1 Swivel & wheel brake**
 150 x 202mm ht, 200mm only
 Foot operated pedal brakes both swivel head and wheel
 Add 'FV' to castor code
- 2 Head seal**
 Prevents ingress of dirt and dust
 Fitted as standard to all swivel castors
- 3 Directional lock**
 150 x 202mm ht, 200mm only
 Two-station plunger lock converts swivel castors to fixed for straight line travel
 Order part number 'P3945'