


○ Stem & socket, top plate or single hole fixing.

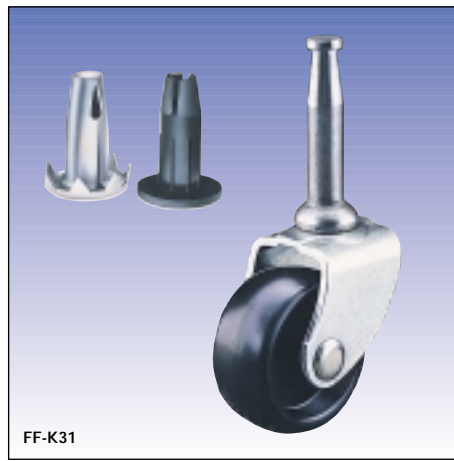

FF series - Stem & socket fixing

whl dia	fitted height	swivel radius	tread width	wheel		plain bore wheel	
				centre	tyre	swivel	rep wheel
31	44	26	15	polypropylene		FF-K31	
41	52	35	15	polypropylene		FF-K41	

Sockets for FF series ►

Nylon or steel toothed sockets supplied separately

Nylon socket

diameter	length	flange diameter	reference
9.5	28	19	SFN

Steel toothed socket

diameter	length	flange diameter	reference
9.5	28	20	SFS


FP series - Top plate fixing

whl dia	fitted height	swivel radius	tread width	wheel		plain bore wheel	
				centre	tyre	swivel	rep wheel
31	42	24	15	polypropylene		FP-K31	
41	52	40	15	polypropylene		FP-K41	


FS series - Single hole fixing

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel	
				centre	tyre		swivel	rep wheel
38	58	40	19	polypropylene		20	FS-N5813	
41	65	40	19	polypropylene	grey rubber	16	FS-P5813	
50	70	45	19	polypropylene		27	FS-N2013	
	70	45	19	polypropylene	grey rubber	23	FS-P2013	

Standard fixings

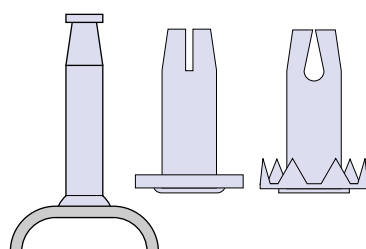


FF type

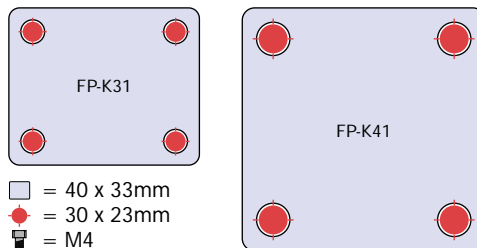


FP type

□ = 40 x 33mm
 ● = 30 x 23mm
 ⚙ = M4

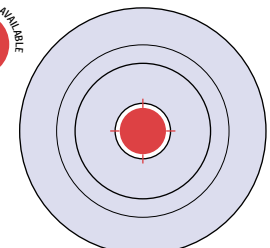

FS type

□ = 51 x 51mm
 ● = 38 x 38mm
 ⚙ = M6

 FIXING BOLTS & NUTS AVAILABLE
Page 31

⚙ = M8

Adaptions

Expanding adaptors

To suit round tube

Available fitted to FS-P2013 as follows:

Tube bore from 18 to 20mm	Castor code FS-P201712
from 21 to 23mm	FS-P201714

Footbrake

Foot operated pedal brakes the wheel

Available on FS-P2013

To order add suffix **'BR'** to castor code