



# M20BH LAG series

- Single hole fixing
- Medium duty pressed steel construction
- Hardened steel balls
- Plastic swivel seal

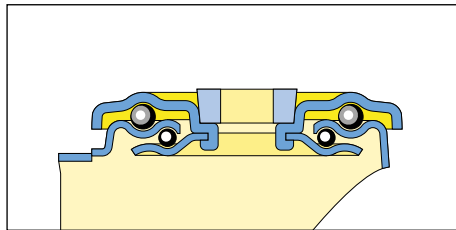

13662GFA

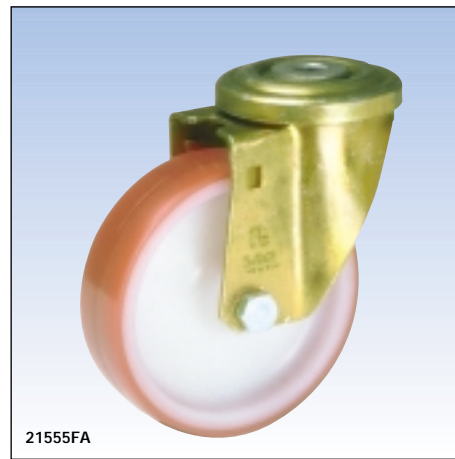


21555FA

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel			roller bearing wheel			ball bearing wheel				
				centre	tyre		swivel	fixed	rep whl	swivel	fixed	rep whl	swivel	fixed	rep whl		
80	105	75	25	polypropylene	black rubber	50	13704FA		13104	13654FA		13054					
			25	polypropylene	elastic grey rubber	55	13704GFA		13104G	13654GFA		13054G					
			30	nylon		120	17552FA		4021	17527FA		4011	17502FA			4001CC	
			25	nylon	polyurethane	100	21552FA		9064	21527FA		9034					
			20	aluminium	polyurethane	120						25352FA		8301	25302FA		8001CC
			20	cast iron	polyurethane	120						23351FA		7501	23301FA**		7001CC
100	128	87	30	polypropylene	black rubber	75	13708FA		13108	13658FA		13058					
			30	polypropylene	elastic grey rubber	85	13708GFA		13108G	13658GFA		13058G	16202FA		2000CC		
	128	87	40	aluminium	elastic black rubber	120				16227FA		2050	17505FA		4002CC		
			30	nylon		120	17555FA		4022	17530FA		4012					
	129	97	40	nylon		200	17553FC		4092	17528FC		4062	17503FC		4072CC		
				nylon	blue rubber	150	30703BFC		30108B	30653BFC		30058B	30603BFC		30008BCC		
	128	87	30	nylon	polyurethane	120	21555FA		9068	21530FA		9038	25305FA		8005CC		
				nylon	soft polyurethane	200				35939FC		35058	35906FC		35008CC		
	128	87	30	aluminium	polyurethane	120				25355FA		8305	23305FA		7005CC		
				cast iron	polyurethane	120				23355FA		7505					
	125	153	103	37	polypropylene	black rubber	90	13712FA		13112	13662FA		13062				
				37	polypropylene	elastic grey rubber	110	13712GFA		13112G	13662GFA		13062G				
153		103	37	pressed steel	black rubber	120	10712FA		10112	10662FA		10062	10614FC		10012CC		
			30	nylon		120	17556FA		4093	17531FA		4063	17508FC		4003CC		
160		112	40	nylon		200	17558FC		4023	17533FC		4013					
				nylon	blue rubber	180	30709BFC		30114B	30659BFC		30064B	30609BFC		30014BCC		
153		103	30	nylon	polyurethane	120	21556FA		9072	21531FA		9042					
				nylon	polyurethane	200	21558FC		9072	21533FC		9042					
160		112	40	nylon	soft polyurethane	200				35948FC		35066	35915FC		35016CC		
				aluminium	elastic black rubber	120				16228FA		2053	16203FA		2003CC		
160		112	50	aluminium	elastic black rubber	200				16230FC		2051	16205FC		2002CC		
				aluminium	polyurethane	120				25357FA		8309	25307FA		8009CC		
160		112	30	aluminium	polyurethane	200				25359FC		8309	25309FC		8009CC		
				cast iron	polyurethane	200				23359FC		7509	23309FC		7009CC		

\*\* = single bearing in the wheel

## Standard fixings

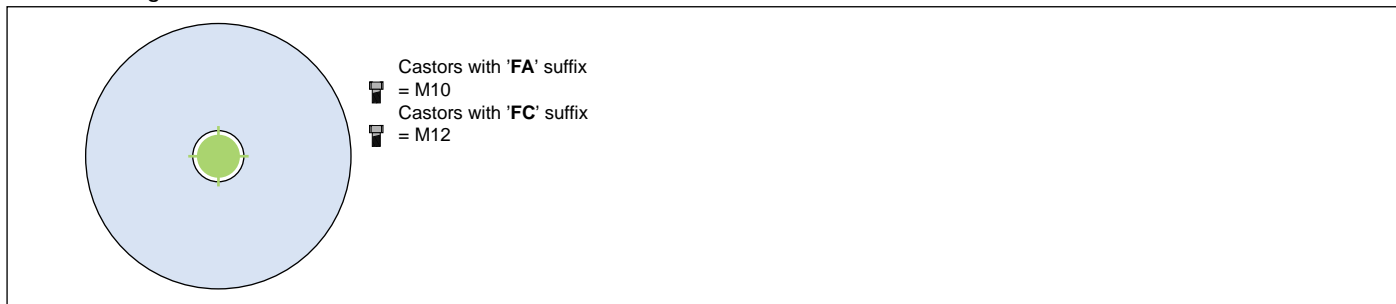

## Adaptions

castors with suffix	alternative	replace suffix with
FA	M12	FB
FC	M14	FD

**2 Swivel & wheel brake**  
Foot operated pedal brakes both swivel head and wheel  
Add 'FR' to castor code

**3 Threadguards**  
Prevent thread from binding wheel  
Ask for availability

# LAG M20BH series




10722FC




16234FE

- Single hole fixing
- Medium duty pressed steel construction
- Hardened steel balls
- Plastic swivel seal

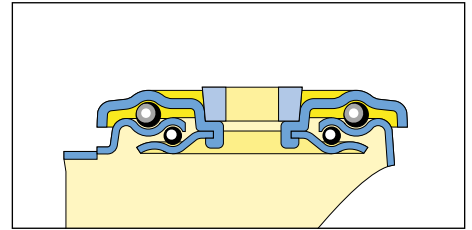

whl dia	fitted height	swivel radius	tread width	wheel		load capacity	plain bore wheel			roller bearing wheel			ball bearing wheel			
				centre	tyre		swivel	fixed	rep whl	swivel	fixed	rep whl	swivel	fixed	rep whl	
150	181	126	40	polypropylene	black rubber	125	13722FC		13122	13672FC		13072				
			40	polypropylene	elastic grey rubber	150	13722GFC		13122G	13672GFC		13072G				
			40	pressed steel	black rubber	170	10722FC		10122	10672FC		10072		10622FC		10022
			40	pressed steel	elastic grey rubber	200	10722GFC		10122G	10672GFC		10072G		10622GFC		10022G
			40	nylon	black rubber	200	17561FC		4024	17536FC		4014		17511FC		4004CC
			40	nylon	blue rubber	200	30717BFC		30122B	30667BFC		30073B		30617BFC		30022BCC
			40	nylon	polyurethane	200	21561FC		9076	21536FC		9046				
			40	nylon	soft polyurethane	200				35954FC		35071		35921FC		35020CC
			40	aluminium	polyurethane	200				25366FC		8317		25316FC		8017CC
			40	cast iron	polyurethane	200				23366FC		7516		23316FC		7015CC
160	192	131	40	polypropylene	black rubber	135	13726FC		13126	13676FC		13076				
			40	polypropylene	elastic grey rubber	160	13726GFC		13126G	13676GFC		13076G				
			40	pressed steel	black rubber	180	10726FC		10126	10676FC		10076		10626FC		10026
			40	pressed steel	elastic grey rubber	200	10726GFC		10126G	10676GFC		10076G		10626GFC		10026G
			50	aluminium	elastic black rubber	300				16234FE		2055		16209FE		2005CC
			50	aluminium	polyurethane	300				25371FE		8320		25321FE		8020CC
200	240	159	50	polypropylene	black rubber	205	13736FE		13136	13686FE		13086				
			50	polypropylene	elastic grey rubber	200	13736GFE		13136G	13686GFE		13086G				
			50	pressed steel	black rubber	230	10736FE		10136	10686FE		10086		10636FE		10036
			50	pressed steel	elastic grey rubber	280	10736GFE		10136G	10686GFE		10086G		10636GFE		10036G
			50	aluminium	elastic black rubber	300				16241FE		2059		16216FE		2009CC
			50	nylon		300	17567FE		4027	17542FE		4017		17517FE		4007CC
			50	nylon	blue rubber	300				30690BFE		30090B		30640BFE		30040BCC
			50	nylon	polyurethane	300	21567FE		9084	21542FE		9054				
			50	nylon	soft polyurethane	300				35960FE		35081		35927FE		35031CC
			50	aluminium	polyurethane	300				25381FE		8330		25331FE		8032CC
			40	cast iron	polyurethane	300				23379FE		7528		23329FE		7028CC

## Standard fixings

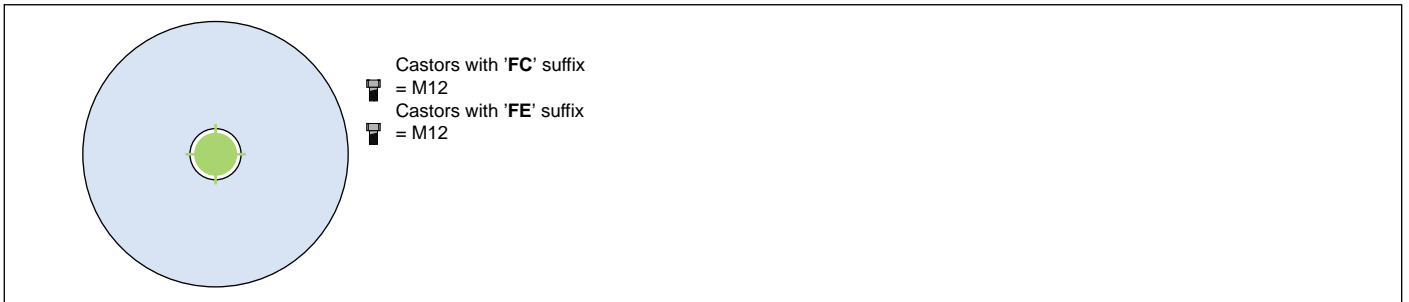

## Adaptions

castors with suffix	alternative	replace suffix with
FC	M14	FD
FE	M16	FF
FE	M18	FC

**2 Swivel & wheel brake**  
 Foot operated pedal brakes both swivel head and wheel  
 Add 'FR' to castor code

**3 Threadguards**  
 Prevent thread from binding wheel  
 Ask for availability