




- Rubber or polyurethane balls fitted to a threaded mild steel arm
- Mounted to provide a 'bed' for easy transfer of glass

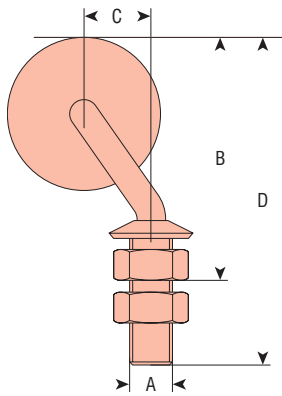

SPG + Rubber ball

ball diameter	A	B min	B max	C	D	load capacity	SPG + Rubber ball		
							swivel	fixed	swivel + total stop brake
35	M14	55	77	20	88	15	SPGC 35		
50	M14	73	95	33	106	20	SPGC 50		

SPG + Polyurethane ball

ball diameter	A	B min	B max	C	D	load capacity	SPG + Polyurethane ball		
							swivel	fixed	swivel + total stop brake
35	M14	55	77	20	88	15	SPGR 35		
50	M14	73	95	33	106	20	SPGR 50		

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated