


V50Q | AR | PLATE FIXING



BLACK RUBBER TYRED WHEEL WITH ALUMINIUM CENTRE



wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
100	35	150.5	53	160	ball	V50Q 100 ARJ P05	V51Q 100 ARJ P05	V52Q 100 ARJ P05
125	48	178	53	200	ball	V50Q 125 ARJ P05	V51Q 125 ARJ P05	V52Q 125 ARJ P05
160	42	205	53	300	ball	V50Q 160 ARJ P05	V51Q 160 ARJ P05	V52Q 160 ARJ P05
200	37	245	53	400	ball	V50Q 200 ARJ P05	V51Q 200 ARJ P05	V52Q 200 ARJ P05
250	40	294	53	550	ball	V50Q 250 ARJ P05	V51Q 250 ARJ P05	V52Q 250 ARJ P05

V50Q | AP | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

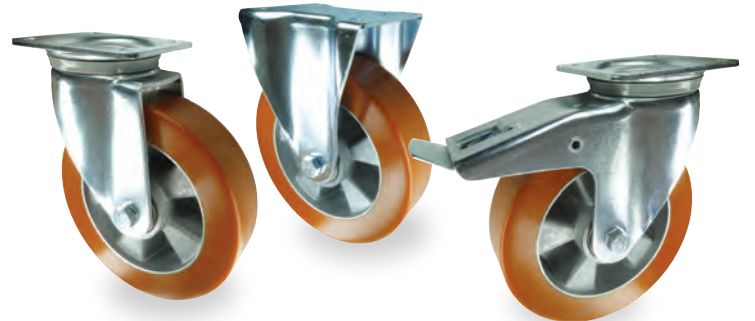

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
100	50	150.5	53	350	ball	V50Q 100 APJ P05	V51Q 100 APJ P05	V52Q 100 APJ P05
125	50	178	53	450	ball	V50Q 125 APJ P05	V51Q 125 APJ P05	V52Q 125 APJ P05
160	50	205	53	550	ball	V50Q 160 APJ P05	V51Q 160 APJ P05	V52Q 160 APJ P05
200	50	245	53	800	ball	V50Q 200 APJ P05	V51Q 200 APJ P05	V52Q 200 APJ P05

i All dimensions are in mm and all loadings are in kg unless otherwise stated