


## VSH | AR | PLATE FIXING


BLACK RUBBER TYRED WHEEL WITH ALUMINIUM CENTRE

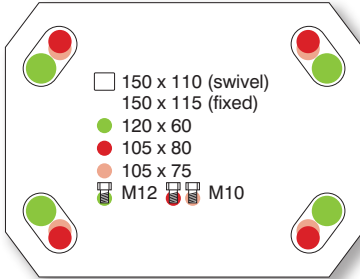

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	35	152	34	160	ball	VSH 100 ARJ P06	VFH 100 ARJ P06	VSH 100 ARJ P06 SWB
125	48	177	45	200	ball	VSH 125 ARJ P06	VFH 125 ARJ P06	VSH 125 ARJ P06 SWB
150	42	202	49	300	ball	VSH 150 ARJ P06	VFH 150 ARJ P06	VSH 150 ARJ P06 SWB
200	37	252	54	400	ball	VSH 200 ARJ P06	VFH 200 ARJ P06	VSH 200 ARJ P06 SWB
250	40	303	70	550	ball	VSH 250 ARJ P06	VFH 250 ARJ P06	VSH 250 ARJ P06 SWB

## VSH | AP | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

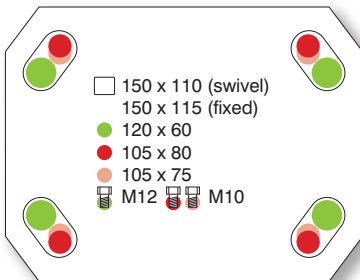

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	50	152	34	350	ball	VSH 100 APJ P06	VFH 100 APJ P06	VSH 100 APJ P06 SWB
125	50	177	45	450	ball	VSH 125 APJ P06	VFH 125 APJ P06	VSH 125 APJ P06 SWB
150	50	202	49	550	ball	VSH 150 APJ P06	VFH 150 APJ P06	VSH 150 APJ P06 SWB
200	50	252	54	800	ball	VSH 200 APJ P06	VFH 200 APJ P06	VSH 200 APJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated