


## VSH | NY | PLATE FIXING


### NYLON WHEEL

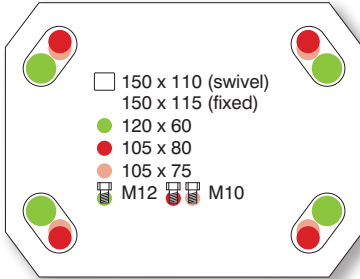

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	50	152	34	600	ball	VSH 100 NYJHD P06	VFH 100 NYJHD P06	VSH 100 NYJHD P06 SWB
125	50	177	45	700	ball	VSH 125 NYJHD P06	VFH 125 NYJHD P06	VSH 125 NYJHD P06 SWB
150	50	202	49	800	ball	VSH 150 NYJHD P06	VFH 150 NYJHD P06	VSH 150 NYJHD P06 SWB
200	50	252	54	1200	ball	VSH 200 NYJHD P06	VFH 200 NYJHD P06	VSH 200 NYJHD P06 SWB
250	50	303	70	1200	ball	VSH 250 NYJHD P06	VFH 250 NYJHD P06	VSH 250 NYJHD P06 SWB

## VSH | NP | PLATE FIXING

### GREY POLYURETHANE TYRED WHEEL WITH NYLON CENTRE

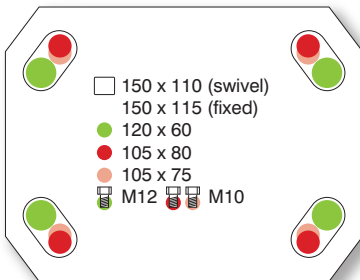

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
100	40	152	34	300	ball	VSH 100 NPJ P06	VFH 100 NPJ P06	VSH 100 NPJ P06 SWB
125	45	177	45	400	ball	VSH 125 NPJ P06	VFH 125 NPJ P06	VSH 125 NPJ P06 SWB
150	50	202	49	500	ball	VSH 150 NPJ P06	VFH 150 NPJ P06	VSH 150 NPJ P06 SWB
200	57	252	54	800	ball	VSH 200 NPJ P06	VFH 200 NPJ P06	VSH 200 NPJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated